



TECHNOPOWER

FPT 400

POWERED BY FPT
C13 TE3A



Genset Model	FPT 400
Engine Model	C13 TE3A
Alternator Model	ECO40 1S4 C
Controller Model	Deep Sea 6110 MKIII

PRIME RATINGS


These ratings are applicable for supplying continuous electrical power (at variable load) in lieu of commercial purchased power. There is no limitation to the annual hours of operation and this model can supply 10% Overload power for 1 hour in 12 hours operation.

STANDBY RATINGS

These ratings are applicable for supplying continuous electrical power (at variable load) in the event of a utility power failure. No overload is permitted on these ratings.

OUTPUT RATINGS		50Hz		60Hz	
		PRIME	STANDBY	PRIME	STANDBY
KVA POWER	KVA	400	440	423	498
KW POWER	KW	320	352	338	374
RATED SPEED	r.p.m	1500		1800	
VOLTAGE	V	230/400 240/415		110/220 220/380	

ENGINE SPECIFICATIONS

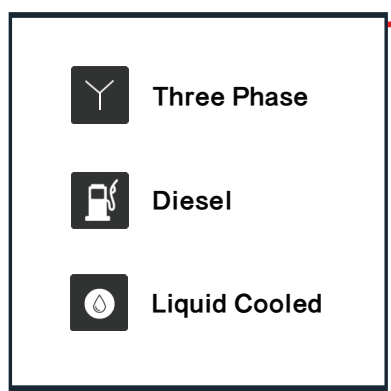

Manufacturer	FPT
Model	C13 TE3A
Engine Type	4-stroke
Cooling System	Liquid Cooled
Bore and Stroke	135 x 150 mm
Compression Ratio	16.5 : 1
Number of cylinders and arrangement	6/ Vertical in Line
Circuit Breaker Type	3Pole MCCB
Aspiration	Turbo Aftercooler air/air
Displacement	12.88 L



TECHNOPOWER FZC

Q4-94, SHARJAH AIRPORT INT'L FREEZONE (SAIF ZONE), SHARJAH, UAE.

Call: +971 6557 9794, Fax: +971 6557 9792, Email: sales@technopowergroup.com, Website: www.technopowergroup.com



TECHNOPOWER

FPT 400
POWERED BY FPT
C13 TE3A



ALTERNATOR SPECIFICATIONS

Manufacturer Mecc Alte

Model ECO40 1S4 C

Pole number 4

Phase number 3

Wires 12

Execution Brushless

Power factor 0.8

Over speed (rpm) 2250

Voltage Regulation(steady state) +/- 1.0%

Wave from NEMA=TIF 50

Wave From IEC=THF 2.0%

Winding pitch 2/3

Radio Interference Supression is in line with European Standard EN55011

Regulator type DSR

IP23 Protection


H Class Insulation

SHUNT Excitation System

WEIGHT AND DIMENSIONS



		OPEN	CLOSE
LENGTH	mm	3530	4300
WIDTH	mm	1390	1600
HEIGHT	mm	1740	2252
WEIGHT	kg	2970	3569



TECHNOPOWER FZC

Q4-94, SHARJAH AIRPORT INT'L FREEZONE (SAIF ZONE), SHARJAH, UAE.

Call: +971 6557 9794, Fax: +971 6557 9792, Email: sales@technopowergroup.com, Website: www.technopowergroup.com



TECHNOPOWER

FPT400
POWERED BY FPT
C13 TE3A

Fuel Filter Type

Replaceable Element

Recommended Fuel

Class A2 Diesel

Fuel Tank Capacity

817 L

FUEL CONSUMPTION (L/hr)

50Hz

60Hz



100%
of Prime



80%
of Prime



100%
of Prime



80%
of Prime

FUEL SYSTEM

EXHAUST			50Hz		60Hz	
	SILENCER TYPE		INDUSTRIAL			
	SILENCER NOISE REDUCTION LEVEL		22dB		22dB	
	MAX. ALLOWABLE BACK PRESSURE kPa(mbar)		5(50)		5(50)	
			PRIME	STANDBY	PRIME	STANDBY
	EXHAUST GAS FLOW kg/hr		2210	2210	2463	2463
	EXHAUST GAS TEMPERATURE °C (°F)		445(833)	445(833)	450(842)	450(842)

EXHAUST SYSTEM



TECHNOPOWER FZC

Q4-94, SHARJAH AIRPORT INT'L FREEZONE (SAIF ZONE), SHARJAH, UAE.

Call: +971 6557 9794, Fax: +971 6557 9792, Email: sales@technopowergroup.com, Website: www.technopowergroup.com



TECHNOPOWER

FPT 400
POWERED BY FPT
C13 TE3A

A I R	AIR FILTER TYPE		Dry			
			50Hz		60Hz	
			PRIME	STANDBY	PRIME	STANDBY
	COMBUSTION AIR FLOW	m ³ /hr(kg/hr)	1770(2131)	1770(2131)	1974(2376)	1974(2376)
	MAX. COMBUSTION AIR INTAKE RESTRICTION	kPa(mbar)	2.0(20)		2.0(20)	

LUBRICATION SYSTEM

Oil Filter Type	Spin-on , Full Flow	
Total Oil Capacity	L	35.0
Oil Pan	L	27.0
Oil Type	ACEA E3/E5	

COOLING SYSTEM

		50Hz	60Hz
Water Pump Type		Centrifugal	
Cooling System Capacity	L	68.0	68.0
Power Consumption	kWm	15.0	25.0
Radiator Cooling Airflow	m ³ /s	6.8	8.5
External Restriction to Cooling Airflow	Pa	196	196



TECHNOPOWER FZC

Q4-94, SHARJAH AIRPORT INT'L FREEZONE (SAIF ZONE), SHARJAH, UAE.

Call: +971 6557 9794, Fax: +971 6557 9792, Email: sales@technopowergroup.com, Website: www.technopowergroup.com



TECHNOPOWER



AUTHORISED GOLD DISTRIBUTOR



DSE Genset®



DSE6110/20 MKIII

**AUTO START & AUTO MAINS (UTILITY)
FAILURE CONTROL MODULES**



DSE6110 MKIII



DSE6120 MKIII

KEY FEATURES

- 4-line back-lit LCD text display
- Multiple display languages
- Five-key menu navigation
- LCD alarm indication
- Customisable power-up text and screen images.
- DSENet® expansion compatibility
- Data logging facility
- Internal PLC editor
- Protections disable feature
- Fully configurable via PC using USB communications
- Front panel configuration with PIN protection
- Power save mode
- 3-phase generator sensing and protection
- 3-phase mains (utility) sensing and protection (DSE6120 MKIII only)
- Automatic load transfer control (DSE6120 MKIII only)
- Generator current and power monitoring (kW, kvar, kVA, pf)
- Mains (utility) current and power monitoring (kW, kvar, kVA, pf) (DSE6120 MKIII only)
- kW overload alarm
- Over current protection
- Breaker control via fascia buttons
- Fuel and start outputs configurable when using CAN
- 6 configurable DC outputs
- 4 configurable analogue/digital inputs
- Support for 0 V to 10 V & 4 mA to 20 mA sensors
- 8 configurable digital inputs
- CAN, MPU and alternator frequency speed sensing in one variant
- Real time clock
- Manual and automatic fuel pump control
- Engine pre-heat and post-heat functions
- Engine run-time scheduler
- Engine idle control for starting & stopping
- Fuel level alarms
- 3 configurable maintenance alarms
- Compatible with a wide range of CAN engines, including Tier 4 engine support
- Uses DSE Configuration Suite PC Software for simplified configuration
- Licence-free PC software
- IP65 rating (with optional gasket) offers increased resistance to water ingress
- Configurable CAN read & transmitted information.
- 1 alternative configuration.

KEY BENEFITS

- Automatically transfers between mains (utility) and generator (DSE6120 MKIII only) for convenience.
- Hours counter provides accurate information for monitoring and maintenance periods
- User-friendly set-up and button layout for ease of use
- Multiple parameters are monitored & displayed simultaneously for full visibility
- The module can be configured to suit a wide range of applications for user flexibility
- PLC editor allows user configurable functions to meet user specific application requirements.

SPECIFICATIONS

DC SUPPLY

CONTINUOUS VOLTAGE RATING

8 V to 35 V Continuous
5 V for up to 1 minute

CRANKING DROPOUTS

Able to survive 0 V for 100 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries. LEDs and backlight will not be maintained during cranking.

MAXIMUM OPERATING CURRENT

260 mA at 12 V, 150 mA at 24 V

MAXIMUM STANDBY CURRENT

145 mA at 12 V, 85 mA at 24 V

CHARGE FAIL/EXCITATION RANGE

0 V to 35 V

GENERATOR & MAINS (UTILITY)

VOLTAGE RANGE

15 V to 415 V AC (Ph to N)
26 V to 719 V AC (Ph to Ph)

FREQUENCY RANGE

3.5 Hz to 75 Hz

MAGNETIC PICKUP

VOLTAGE RANGE

+/- 0.5 V to 70 V

FREQUENCY RANGE

10,000 Hz (max)

INPUTS

DIGITAL INPUTS A TO H

Negative switching

ANALOGUE INPUTS A & D

Configurable as:

Negative switching digital input
0 V to 10 V sensor
4 mA to 20 mA sensor
Resistive sensor

ANALOGUE INPUTS B & C

Configurable as:

Negative switching digital input
Resistive sensor

OUTPUTS

OUTPUT A & B (FUEL & START)

10 A DC at supply voltage

AUXILIARY OUTPUTS C, D, E, F, G & H

2 A DC at supply voltage

DIMENSIONS

OVERALL

216 mm x 158 mm x 43 mm
8.5" x 6.2" x 1.5"

PANEL CUT-OUT

184 mm x 137 mm
7.2" x 5.3"

MAXIMUM PANEL THICKNESS

8 mm
0.3"

STORAGE TEMPERATURE RANGE

-40°C to +85°C
-40 °F to +185 °F

OPERATING TEMPERATURE RANGE

NON-HEATED DISPLAY VARIANT

-30°C to +70°C
-22 °F to +158 °F

HEATED DISPLAY VARIANT

-40 °C to +70 °C
-40 °F to +158 °F

TECHNOPOWER FZC

Q4-94, SHARJAH INT'L AIRPORT FREEZONE (SAIF ZONE), SHARJAH, UAE.

CALL: +971 6557 9794, Fax: +971 6557 9792,

EMAIL: sales@technopowergroup.com, WEBSITE: www.technopowergroup.com



TECHNOPOWER

Silent Canopy



Fuel filling point with key lock



Document holder



Emergency stop button

Central lifting hook
for easy lifting

Control Panel
IP55 Control panel managed by
DSE 6110 MKIII controller

Heavy duty Engines
optimized for low fuel consumption

Alternator - 3phase and
Single phase with AVR

Stainless Steel
Lockable handles & Hinges

Sound proof galvanised canopy 
65dB(A) @7m

In-built fuel tank
made of Polypropylene
with bounded base for 8hrs @full load

Reinforced anti-rollover forklift tunnels 
for safe handling

Easy maintenance
easily removable side part



Fuel Inlet/Outlet



Exhaust pipes with exhaust heat wrap for high-performance and security



Galvanized metal sheet to increase strength & durability



Oil and coolant drain



Anti-vibration pads attenuate vibrations caused by the unit



Exhaust terminal pipe with tilting cap rain over